

HYVA


We move your world



HC 331



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

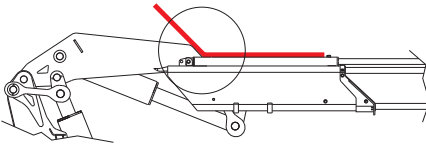

Second boom with negative angle in order to simplify operations in difficult access conditions

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS mm B x h x S
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC331 E1	31,2	9,9	397	25	4	300	3050	160	45	2540x2355x1170
HC331 E2	-	11,8	397	25	4	300	3280	160	45	2540x2355x1170
HC331 E3	-	13,8	397	25	4	300	3500	160	45	2540x2355x1170
HC331 E4	-	15,8	397	25	4	300	3730	160	45	2540x2355x1170
HC331 E5	-	18,1	397	25	4	300	3900	160	45	2540x2355x1170
HC331 E6	-	20,4	397	25	4	300	4060	160	45	2540x2405x1170
HC331 E7	-	22,7	397	25	4	300	4180	160	45	2540x2490x1300
HC331 E8	-	25,0	397	25	4	300	4300	160	45	2540x2550x1300
HC331 E4J4	-	25,7	397	30	4	290	4570	160	45	2540x2620x1330
HC331 E5J4	-	28,0	397	30	4	290	4740	160	45	2545x2620x1330

