

HYVA


We move your world



HC 361



- EES** Extra Extension Speed
- SDS** Smooth Descent System
- LCS** Lift Control System
- LAS** Liftrod Articulating System

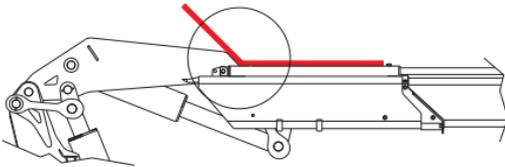

Second boom with negative angle in order to simplify operations in difficult access conditions

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS mm B x h x S
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC361 E1	32,4	9,9	397	25	4	310	3050	160	45	2540x2355x1170
HC361 E2	-	11,8	397	25	4	310	3280	160	45	2540x2355x1170
HC361 E3	-	13,8	397	25	4	310	3500	160	45	2540x2355x1170
HC361 E4	-	15,8	397	25	4	310	3730	160	45	2540x2355x1170
HC361 E5	-	18,1	397	25	4	310	3900	160	45	2540x2355x1170
HC361 E6	-	20,4	397	25	4	310	4060	160	45	2540x2405x1170
HC361 E7	-	22,7	397	25	4	310	4180	160	45	2540x2490x1300
HC361 E8	-	25,0	397	25	4	310	4300	160	45	2540x2550x1300
HC361 E4J4	-	25,7	397	30	4	310	4570	160	45	2540x2620x1330
HC361 E5J4	-	28,0	397	30	4	310	4740	160	45	2545x2620x1330

HC 361

- EES**
- SDS**
- LCS**
- LAS**



HC361 E1

kg	32400*	12340**	7980	5635	4085	3070	2355			
m	1,00	2,52	3,98	5,75	7,55	9,60	11,69			

HC361 E2

kg	31120*	11930**	7820	5370	4080	3070	2355	1825		
m	1,00	2,52	3,98	5,75	7,60	9,60	11,69	13,98		

HC361 E3

kg	30400*	11625**	7600	5200	3900	3070	2355	1825	1425	
m	1,00	2,52	4,00	5,75	7,60	9,60	11,70	14,00	16,30	

HC361 E4

kg	29830*	11320**	7275	4950	3670	2845	2355	1805	1425	1120
m	1,00	2,52	4,10	5,85	7,70	9,70	11,70	14,00	16,30	18,65

HC361 E5

kg	29300*	11010**	6975	4730	3485	2660	2175	1825	1425	1120	885
m	1,00	2,52	4,20	5,95	7,80	9,80	11,80	14,00	16,30	18,65	20,75

HC361 E6

kg	28600*	10755**	6730	4510	3280	2485	2000	1650	1425	1120	885
m	1,00	2,52	4,25	6,10	7,90	9,90	11,90	14,10	16,30	18,65	20,75

HC361 E7

kg	28050*	10500**	6375	4290	3125	2345	1850	1500	1275	1120	885
m	1,00	2,52	4,40	6,20	8,10	10,10	12,10	14,30	16,50	18,65	20,75

HC361 E8

kg	27590*	10450**	6130	4085	2925	2170	1705	1365	1140	990	885	410
m	1,00	2,52	4,50	6,30	8,20	10,20	12,20	14,40	16,60	18,80	20,95	23,40

HC361 E4J4

kg									1175	1020	895	805	705	490
m									14,60	16,30	18,10	19,80	21,60	23,40

HC361 E5J4

kg										765	665	585	510	470	360
m										16,80	18,50	20,20	22,00	23,80	25,70

- CE**
- NO CE**
- MANUAL**
- RADIO**

*) Theoretical lifting capacity
 **) Fixed hook capacity